


MOBILE ADHESIVE SMA ANTENNA

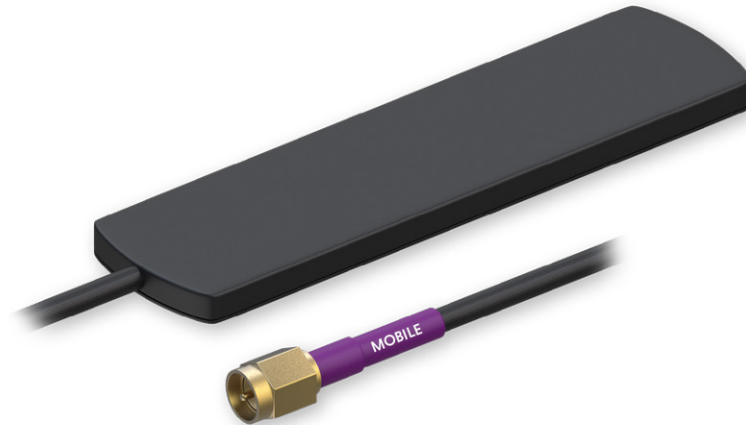


Mechanical/Environmental

Frequency range	824 ~ 960, 1710 ~ 2170 MHz
Polarization	Linear
Gain	2.0 dBi
VSWR	2.0
Impedance	50 Ω
Cable	RG174, 3000 mm
Connector type	SMA Male
Mounting method	Adhesive
Operating temperature	- 40 °C ~ +85 °C
Operating relative humidity	95 % max
IP rating	IP50
RoHS compliant	✓


Radiation patterns

Mobile - Antenna

ELEVATION

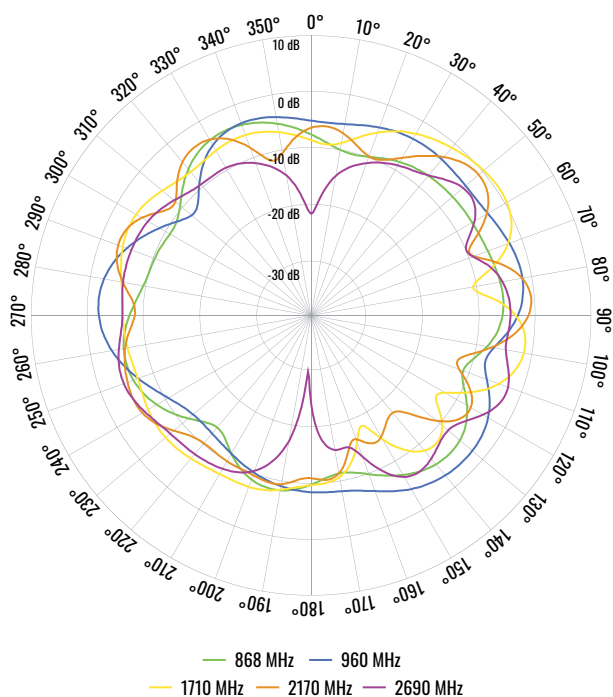

AZIMUTH

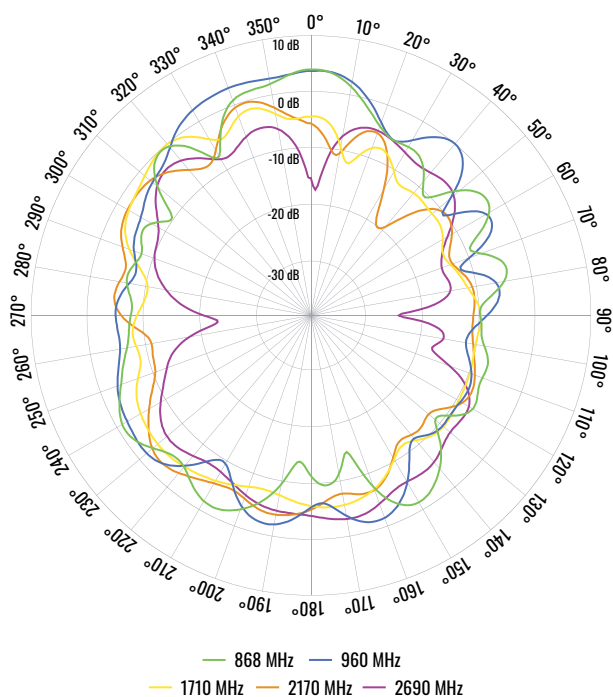

Spatial measurements

